



MANUFACTURED IN COMPLIANCE WITH NFPA 33, OSHA, NEC,
AND BOCA GUIDELINES

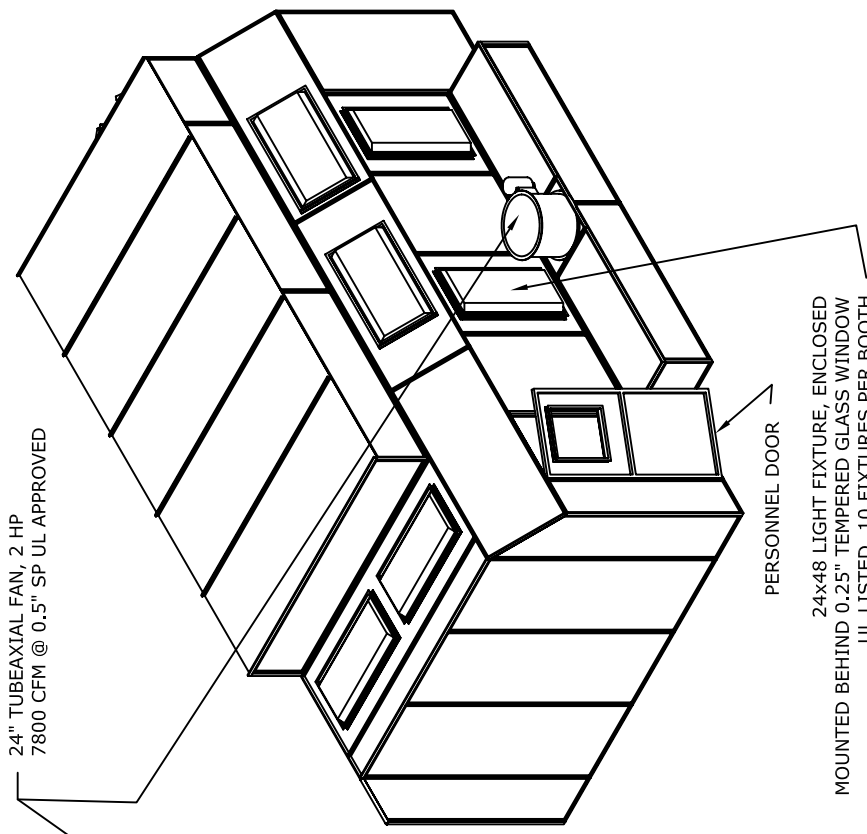

24" TUBEAXIAL FAN, 2 HP
7800 CFM @ 0.5" SP UL APPROVED

PERSONNEL DOOR

24x48 LIGHT FIXTURE, ENCLOSED
MOUNTED BEHIND 0.25" TEMPERED GLASS WINDOW
UL LISTED, 10 FIXTURES PER BOOTH

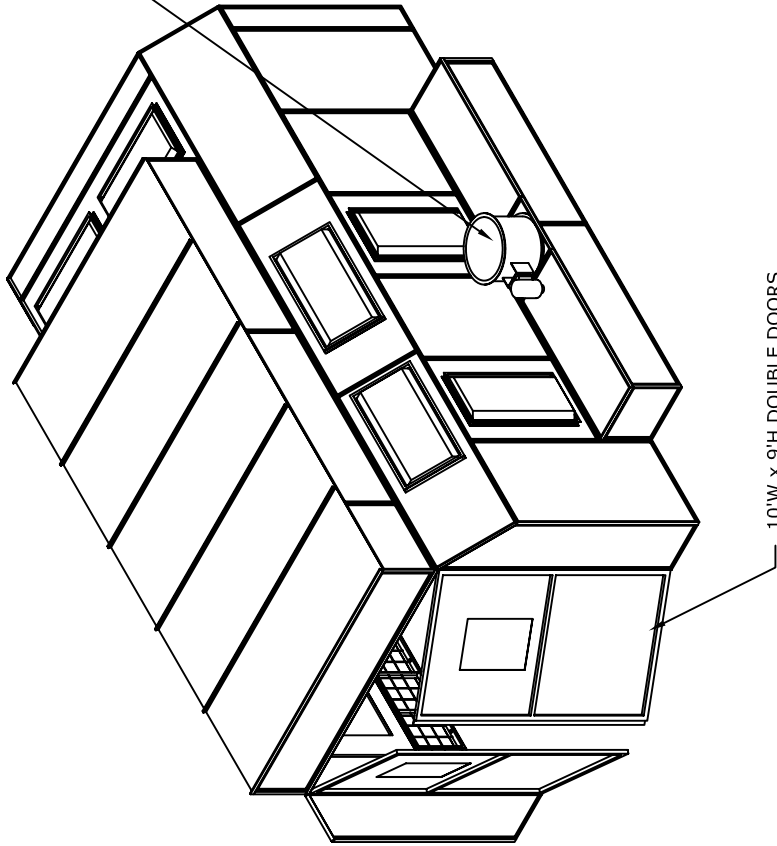

10'W x 9'H DOUBLE DOORS

SDD-1000

18'-11"W x 23'-0"L x 11'-3"H OUTSIDE
14' W x 22'-9" L x 9' H INSIDE

NOTES:

- ALL MATERIALS OF CONSTRUCTION ARE NON-COMBUSTIBLE.
- ALL PANELS ARE 18 GA. GALV SHEET STEEL.
- WINDOWS ARE 3/4" TEMPERED GLASS.
- LIGHT FIXTURES ARE ENCLOSED 2x4 FLORESCENT LAYIN TYPE, UL APPROVED, MOUNTED BEHIND GLASS WINDOW.
- FAN IS TUBEAXIAL-, ALUMINUM BLADE WITH DRIVE BELT IN ENCLOSED SHROUD, UL APPROVED.



Greensboro, NC 27405
Ph - 1-800-451-2425

title	SDD-1000-GH SHEET 1 OF 3		
part no	SDD-1000		
order no	-		
drawn by	MBOWLES		
date	8-3-05		
file name	XXXX	rev	B