



MANUFACTURED IN COMPLIANCE WITH NFPA 33, OSHA,
AND NEC GUIDELINES

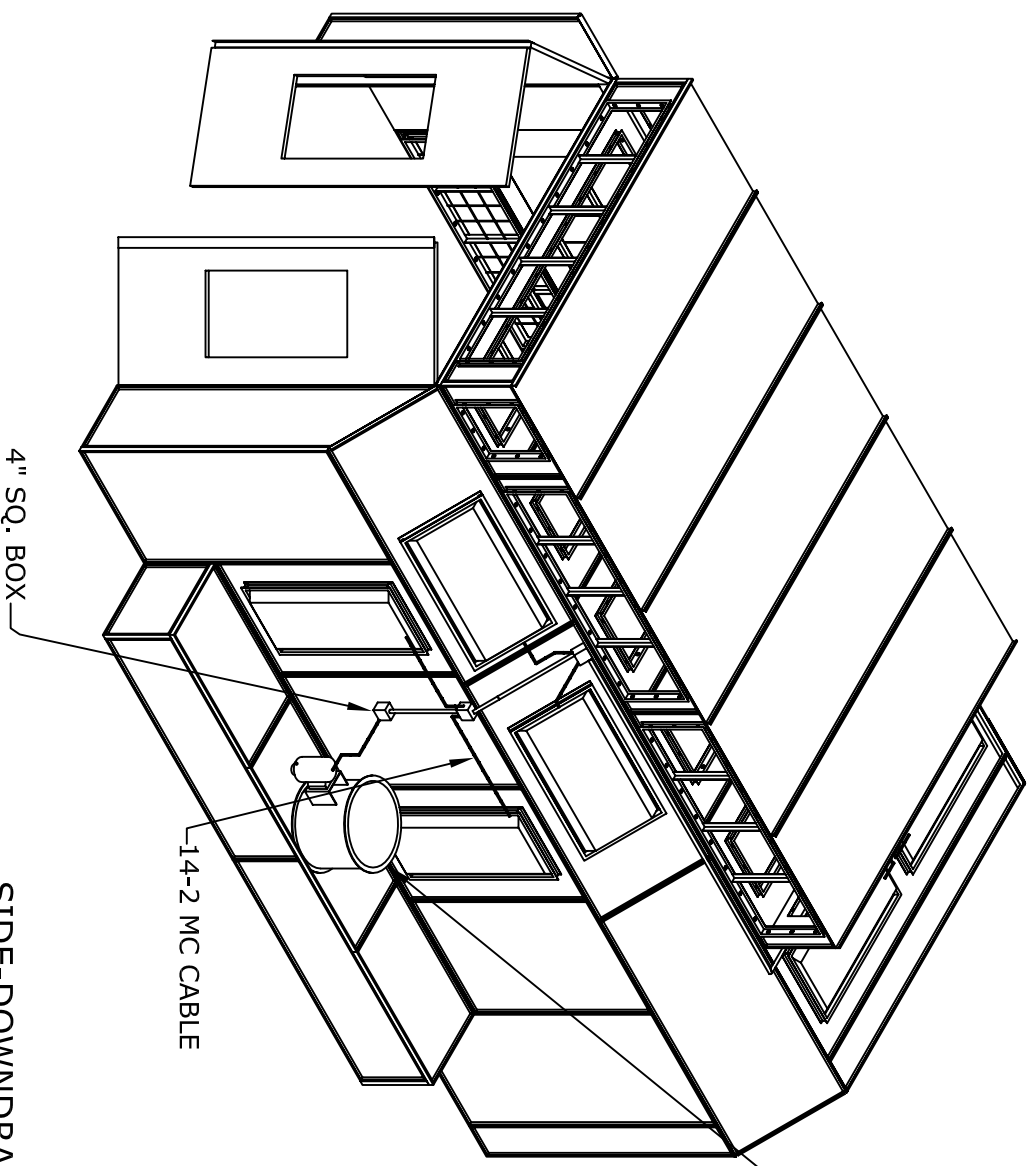

SIDE-DOWN DRAFT SDD-1000
18'-11"W X 23'-0"L X 11'-3"H OUTSIDE
14' W X 22'-9" L X 9' H INSIDE

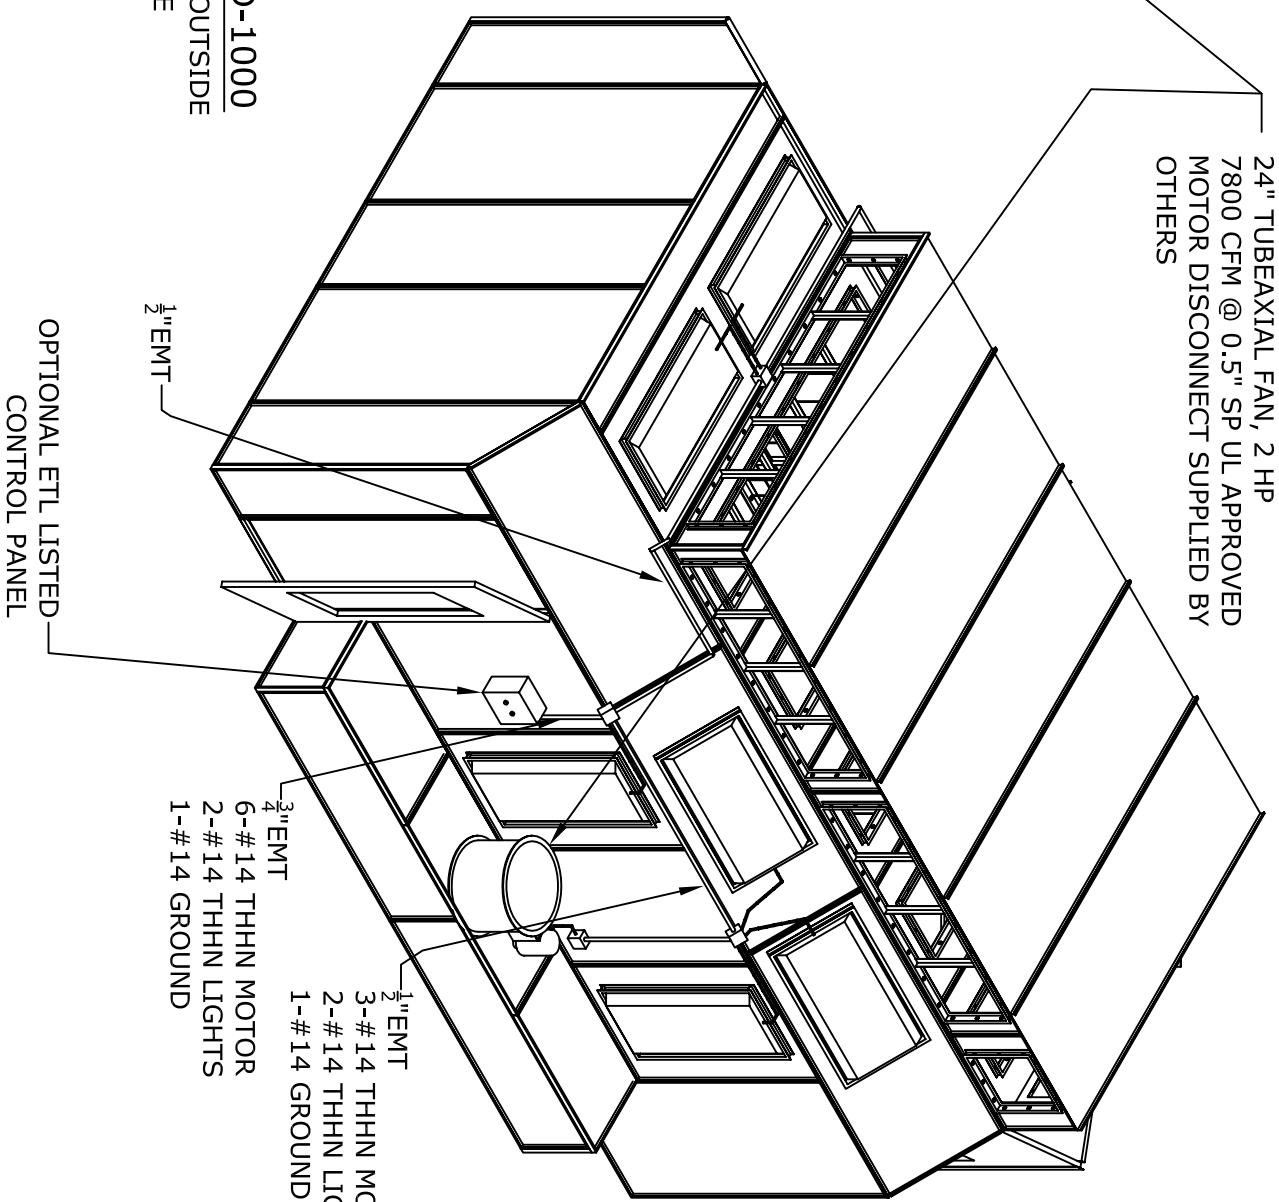

COMPONENTS PROVIDED BY OTHERS:

- WIRING
- MC CABLE
- CONDUIT
- JUNCTION BOXES
- DISCONNECT

NOTES:

- ALL MATERIALS OF CONSTRUCTION ARE NON-COMBUSTIBLE.
- ALL PANELS ARE 18 GA. GALV SHEET STEEL.
- WINDOWS ARE 1/4" TEMPERED GLASS.
- LIGHT FIXTURES ARE ENCLOSED 2x4 FLORESCENT LAYIN TYPE, UL APPROVED, MOUNTED BEHIND GLASS WINDOW.
- FAN IS TUBEAXIAL, ALUMINUM BLADE WITH DRIVE BELT IN ENCLOSED SHROUD, UL APPROVED.
- ALL ELECTRICAL MUST BE MORE THAN 3' AWAY FROM OPENING

Standard Tools and Equipment Co.
Greensboro, NC
Ph - 1-800-451-2425

title SDD-1000 ELECTRICAL RECOMMENDATION

part no SDD-1000

order no -

drawn by J.DEHART

file name XXXX

date 3-12-13

rev A